

# 1216/21

## Gantrail Welded Base Fixing

www.gantrail.com



1216/21


The GANTRAIL 1216/21 adjustable crane rail clip is designed to fix the largest rails in the most arduous applications. It can withstand a horizontal force from the rail of 210kN (21.4 tonnes), which is achieved through the unique double contact face. Its low profile allows it to be used with cranes that are fitted with guide rollers.

### SPECIFICATIONS:

**MAX SIDE LOAD 210kN**  
**21mm HORIZONTAL RAIL ADJUSTMENT**

### DIMENSIONS (mm):


REF No.	X	Y	Z	WEIGHT kg
1216/21/38	38	45	30	N/A
1216/21/45	45	45	30	N/A

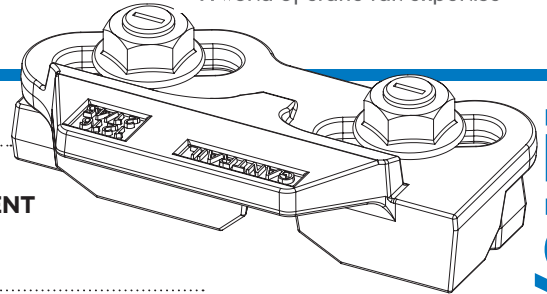

### FEATURES


- The new double contact face between the clip and rail allows for higher side loads.
- The clip has new pad retention geometry, which helps prevent pad migration.
- The clip is welded to the rail support. No access is required from below.
- The two main parts are locked together on tightening the grade 10.9 bolts.
- The clip has a self-tightening mechanism.
- A special vulcanised rubber block applies a controlled force to the rail.

### COMPONENTS

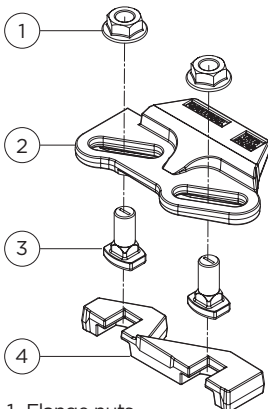


1. Flange nuts
2. Clip cap with integral rubber block
3. M16 Captive bolts
4. Weldable base

### 1 RAIL WITH PAD

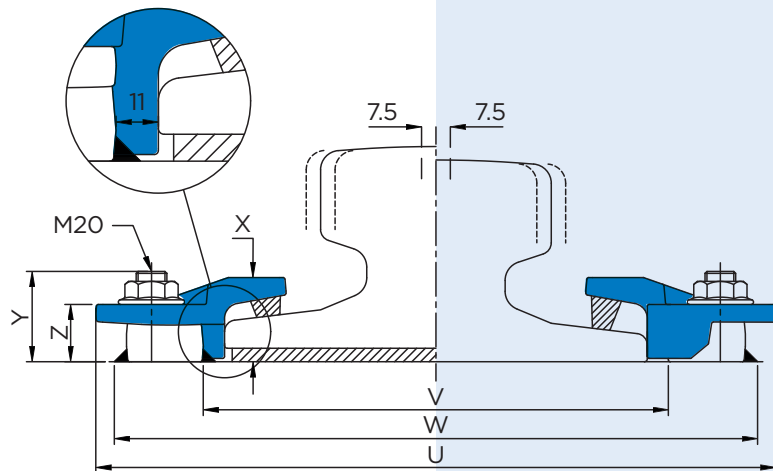


### 2 RAIL WITHOUT PAD\*

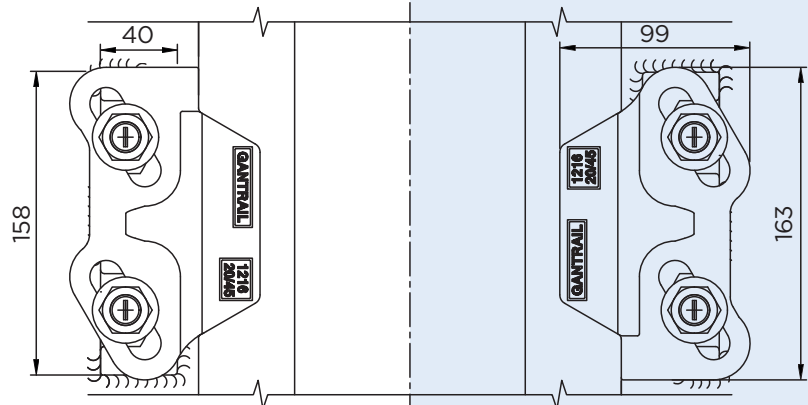


Minimum assembly width -  $W = \text{Rail width (F)} + 116\text{mm}$   $V = \text{Rail width (F)} + 22\text{mm}$   
 $U = \text{Rail width (F)} + 162\text{mm}$

# 1216/21

## Gantrail Welded Base Fixing

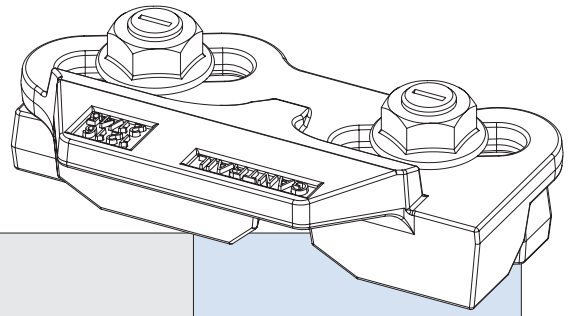

	F mm	C mm	A mm	1. CLIP REFERENCE FOR RAIL WITH PAD	2. CLIP REFERENCE FOR RAIL WITHOUT PAD*
A 75	200	75	85	1216/21/38	1216/21/38
A 100	200	100	95	1216/21/45	1216/21/38
A 120	220	120	105	1216/21/45	1216/21/38
A 150	220	150	150	1216/21/45	1216/21/38
89 kg CR	178	102	114	1216/21/45	1216/21/38
MRS 86	165	102	102	1216/21/45	1216/21/38
MRS 87 A (PRI85R)	152	102	152	1216/21/45	1216/21/38
MRS 125	180	120	180	-	1216/21/45
MRS 221	220	220	160	-	1216/21/45
ISCR 100	150	102	150	1216/21/45	1216/21/38
ISCR 120	170	120	170	1216/21/45	1216/21/38
ISCR 140	170	140	170	-	1216/21/45
QU 100	150	100	150	1216/21/45	1216/21/38
QU 120	170	120	170	1216/21/45	1216/21/38
ISCOR 57	140	70	165	1216/21/45	1216/21/38
CR 73	140	100	135	1216/21/45	1216/21/38
CR 100	155	120	150	1216/21/45	1216/21/38

**This clip can be used for a wider selection of rails than illustrated.**

Please contact GANTRAIL for the full range of possible rails. All rails can be fastened with bolted or welded base clips. GANTRAIL may change or improve their products and also alter specifications without notice.

### INSTALLATION INSTRUCTIONS:


Fillet weld all round the clip base using low hydrogen electrodes. Refer to table for sizes. Recommended electrodes AWS E7018 or E7028. Clip base is made from weldable grade steel.

\* For rail without pad, weld closest to and parallel with the rail must be omitted. Please consult Gantrail for guidance.

TIGHTENING TORQUE 350Nm

Please contact GANTRAIL, for full installation instructions.

### WELD DETAIL

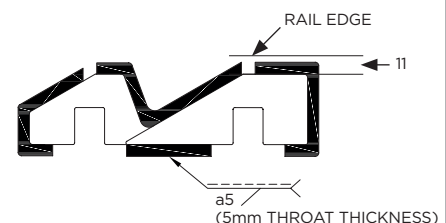

'A' mm	MAX SIDE LOAD kN
5	200
6	235

## A world of crane rail expertise.

[www.gantrail.com](http://www.gantrail.com)



**Gantry Railing Ltd**  
Sudmeadow Road  
Hempsted  
Gloucester GL2 5HG  
ENGLAND

Tel: +44 (0) 1452 300688  
E-mail: [info@gantrail.com](mailto:info@gantrail.com)



1216/21/DO/04/21